

battery type:
battery size:
chemical system:

Lithium Button Cell
 CR2430
 Lithium Manganese Dioxide

CELL PACK
SOLUTIONS

Telephone: +44 (0)191 496 9999
 Email: batteries@cellpacksolutions.co.uk
 Website: www.cellpacksolutions.co.uk

nominal voltage: 3.0 V
open circuit voltage: 3.0...3.4 V
 2.9...3.4 V

Conditions
 new battery
 after 1 year storage at 20°C

all measurements at 22 ± 2°C ambient

capacity
 rated: 300 mAh discharge at 0.4mA constant current; 24hours/day
 End Voltage (EV): 2.0V

minimum: 270 mAh discharge at 0.4mA constant current; 24hours/day
 EV: 2.0V



Standard discharge time
 minimum: 275 h at 3kΩ load (for QC measurement)
 EV: 2.0V

Discharge currents
 standard: 0.4 mA

max. recommended current
 under continuous discharge: 5 mA

max. recommended current
 under pulse discharge: 23 mA


Discharge diagrams:

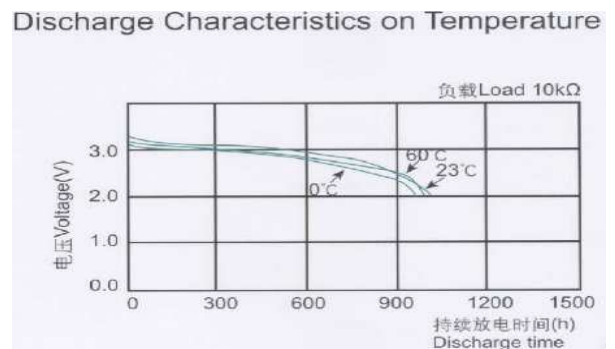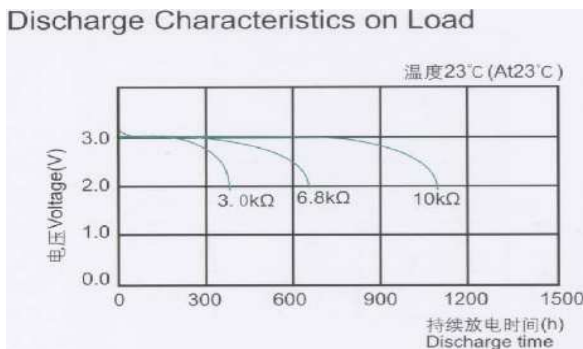

shelf life: 10 years under proper storage conditions (ta: ≤ 22°C; RH: 60 ± 15%)

operating temperature range: - 20...60 °C

mechanical specifications:

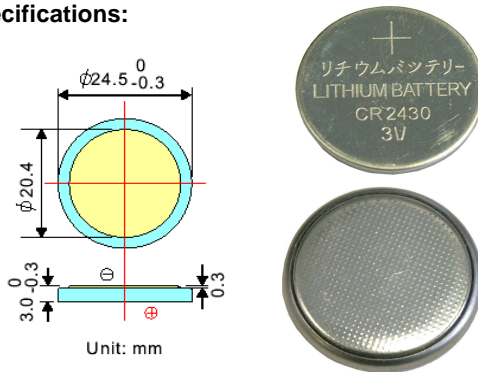

nominal weight: 4.3 g



blister card
 dimensions:
 56 x 71.5mm

weight:
 6g (incl. battery)

	ANSMANN Specifications for model:	CR2430 Lithium Button Cell blister package
	data sheet no. / part no.	5020092
	Version no.	
	author / date	Gramlich / 03.12.2010