

WP5-6 6Volt 5Ah

Specifications

Nominal Voltage(V) **6V**

Nominal Capacity

20 hour rate	(0.25A to 5.25V)	5Ah
10 hour rate	(0.475A to 5.25V)	4.75Ah
5 hour rate	(0.85A to 5.1V)	4.25Ah
1 C	(5A to 4.8V)	2.83Ah
3 C	(15A to 4.8V)	2Ah

Weight **Approx. 830g(1.83Lbs.)**

Internal Resistance (at 1KHz) **Approx. 19 mΩ**

Maximum Discharge Current for 5 seconds: **75A**

Charging Methods at 25 (77)

Cycle use:	
Charging Voltage	7.20 to 7.50V
Coefficient -5.0mV/ /cell	
Maximum Charging Current :	1.5A
Standby use:	
Float Charging Voltage	6.75 to 6.90V
Coefficient -3.0mV/ /cell	

Operating Temperature Range

Charge	-15 (5) to 40 (104)
Discharge	-15 (5) to 50 (122)
Storage	-15 (5) to 40 (104)

Charge Retention (shelf life) at 20 (68)



1 month	92%
3 month	90%
6 month	80%

Case Material **ABS UL94 HB**
Option: Flammability resistance of (UL94 V-0)


Terminal **F1 or F2 (Faston Tab 187 or 250)**




Dimensions mm(inch)

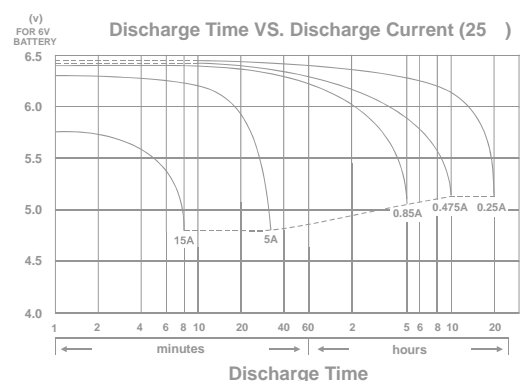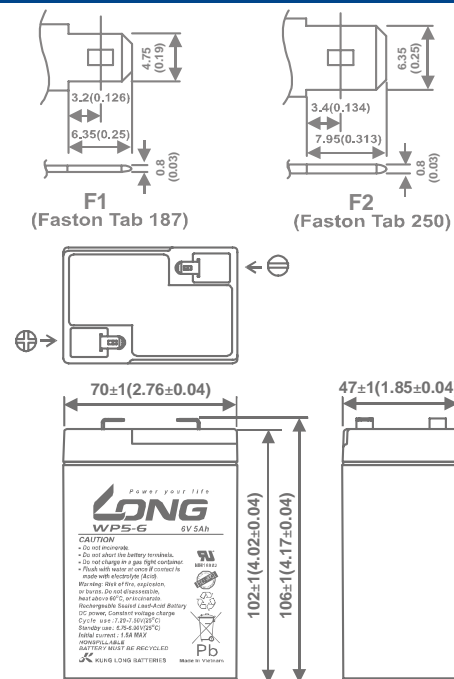


Effect of Temperature on Capacity 25 (77)

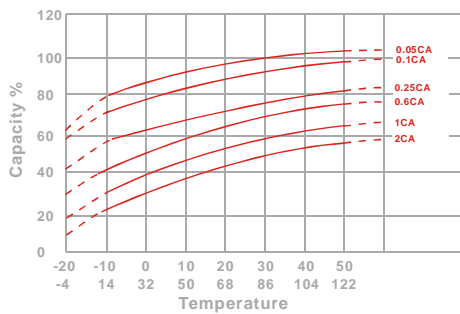


Capacity Retention Characteristic

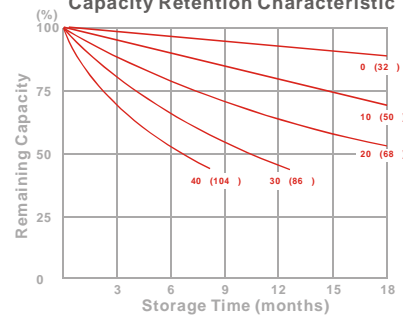

Trickle (or float) Service Life



Cycle Service Life

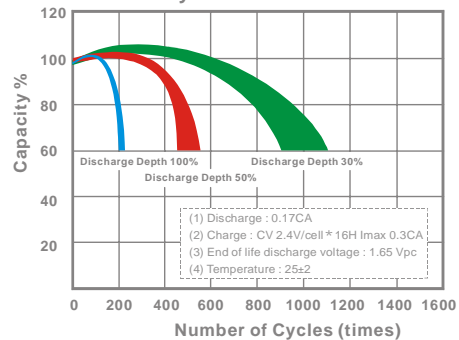

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25 (77)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	23.8	26.8	29.0	31.0	31.8	32.8	34.0
10	min	17.0	19.2	20.5	21.5	22.0	22.5	23.0
15	min	14.1	15.6	16.2	16.5	16.7	16.8	17.0
30	min	8.18	9.15	9.52	9.70	9.80	9.92	10.03
60	min	4.20	4.77	5.13	5.43	5.53	5.65	5.73
120	min	2.48	2.77	2.90	3.00	3.05	3.12	3.18
180	min	1.97	2.17	2.27	2.35	2.38	2.43	2.48
240	min	1.60	1.73	1.80	1.85	1.88	1.92	1.95
300	min	1.46	1.56	1.60	1.64	1.65	1.68	1.72
600	min	0.855	0.913	0.940	0.960	0.968	0.978	0.992
1200	min	0.432	0.468	0.498	0.510	0.513	0.520	0.527

- Discharge Rates in Amperes to Various End Voltages at 25 (77)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	15.3	17.6	18.9	19.5	19.7	19.9	20.2
10	min	10.5	11.7	11.9	12.1	12.2	12.3	12.4
15	min	7.86	8.52	9.01	9.22	9.29	9.37	9.45
30	min	4.39	4.94	5.11	5.25	5.30	5.35	5.41
60	min	2.39	2.64	2.76	2.87	2.9	2.94	2.97
120	min	1.34	1.46	1.52	1.56	1.57	1.59	1.61
180	min	1.10	1.16	1.19	1.21	1.22	1.23	1.24
240	min	0.855	0.911	0.936	0.962	0.968	0.975	0.983
300	min	0.790	0.826	0.839	0.851	0.855	0.860	0.866
600	min	0.437	0.464	0.476	0.485	0.489	0.493	0.498
1200	min	0.229	0.243	0.251	0.257	0.260	0.263	0.267

All data on the spec. sheet is an average value:

The tolerance range : X<6min(+15%~-15%), 6min X<10min(+12%~-12%), 10min X < 60min(+8%~-8%), X 60min(+5%~-5%)