



ANT MC1 Plus

Upgraded with a tiny display, you can easily read the charging current, the battery power and the charging status. ANT automatically chooses the most suitable charging current (0.5A or 1A) for your batteries to ensure the longest lifespan of them. Mini but mighty, ANT can fully charge a VTC5 in 3 hours with 1A just like an ant can lift 20 times its own body weight. Inserting your battery, ANT will take care of the rest!

Revolution Reinvented.



[Easy-to-read Tiny Display]

Charging current, battery power and charging status are clearly showed.

[Tiny but Mighty]

Ultra compact design with greatest compatibility.

3.6V/3.7V Li-ion / IMR / INR / ICR:
10440 14500 14650 16340 17335
17500 17670 18350 18490 18500
18650 18700 22650 25500 26650



[Intelligent Recognition]

Automatically choose suitable charging current (0.5A or 1.0A) to maximize the battery lifespan.



[Micro USB Charging Port]

Charge Everywhere.

Compatible with all 5V USB power including USB wall adaptors, cell phone chargers, solar panel, PC USB, power banks, etc.



computer



power line



power bank



[0V Activation Function]

Recharge a "damaged" (Low voltage) battery.

Recondition and refresh old or over-discharged batteries.



[The Safest Charger with Longest Warranty]

Safe, Durable and Peace of Mind.



CE, FCC, RoHS certified.

2 years warranty.

Extra-low safe input voltage.


Temperature monitoring.

Flame retardant material.

Reverse polarity and short circuit protection.


[Battery Life Optimization Charging]

Accurate cut-off, efficient charging and never over charge batteries.

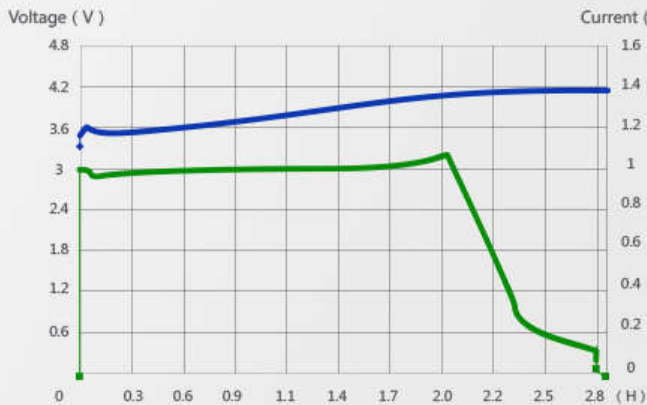

Li-ion: XTVTC4/2200mAh-1.0A

◆ Voltage
■ Current

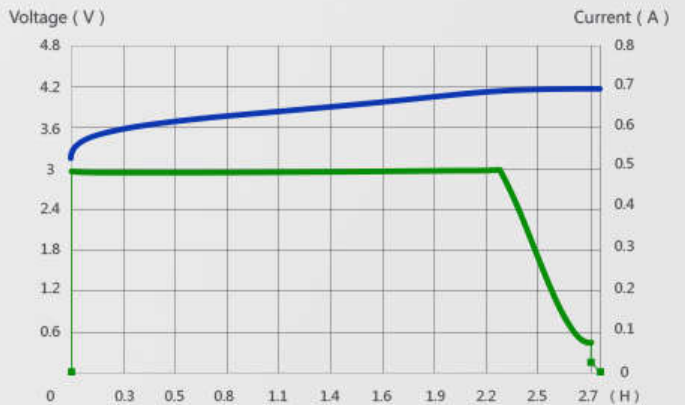

Li-ion: XTAR1850/1100mAh-0.5A

[ANT MC1 Plus Specification]

Input	DC 5.0V/1000mA
0.5A Constant current	500mA
1.0A Constant current	1000mA
Cut-off Voltage	4.2V
Operation Temperature	0-40°C

Net weight: 27g / Size: L92*W27*H26mm

[Package Contents]

ANT MC1 Plus charger, USB cable,
Hop-pocket, Manual, Warranty

