


New
BK200AAP
AA size (HR 15/51)


Standard type



■ Dimensions (with tube)

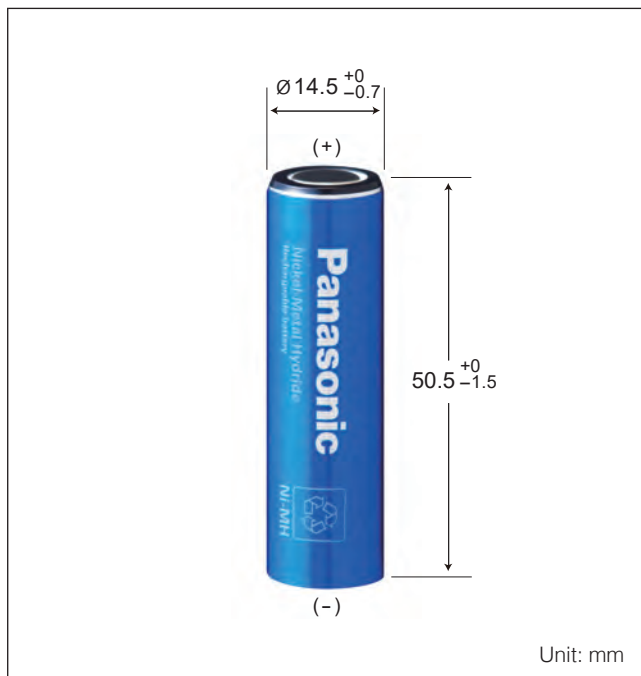

■ Typical charge characteristics

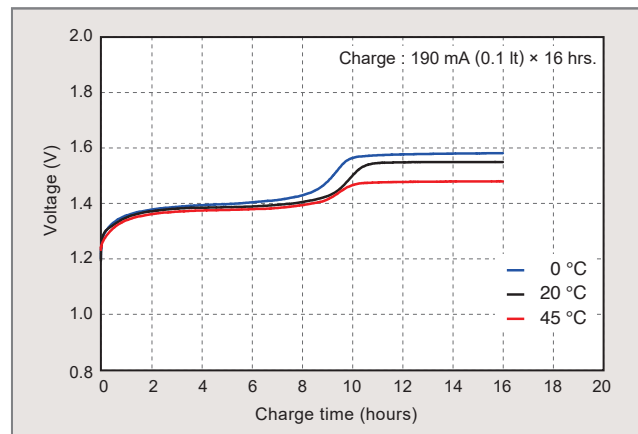


■ Specifications


Diameter	14.5 +0 / -0.7 mm
Height	50.5 +0 / -1.5 mm
Approximate Weight	28 g

Nominal Voltage		1.2 V
Discharge Capacity	Average ^{*1}	1980 mAh
	Rated (min.)	1900 mAh
Approx. Internal impedance at 1000Hz at charged state.		20 mΩ
Charge	Standard	190 mA X 16 hrs.
	Rapid ^{*3}	1200 mA X 2.0 hrs.
Ambient Temperature	Charge	Standard: 0 °C to 45 °C Rapid: 0 °C to 40 °C
	Discharge	-10 °C to 65 °C
Storage	<1 year	-20 °C to 35 °C
	<6 months	-20 °C to 45 °C
	<1 month	-20 °C to 55 °C
	<1 week	-20 °C to 65 °C

*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It.
*2 For reference only.
*3 Need specially designed control system. Please contact Panasonic for details.

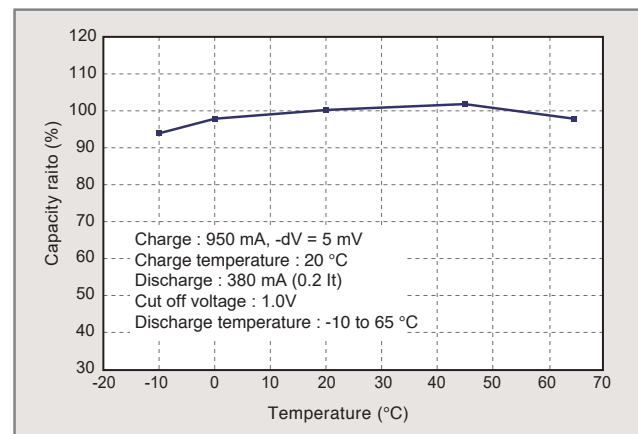

■ Typical discharge characteristics

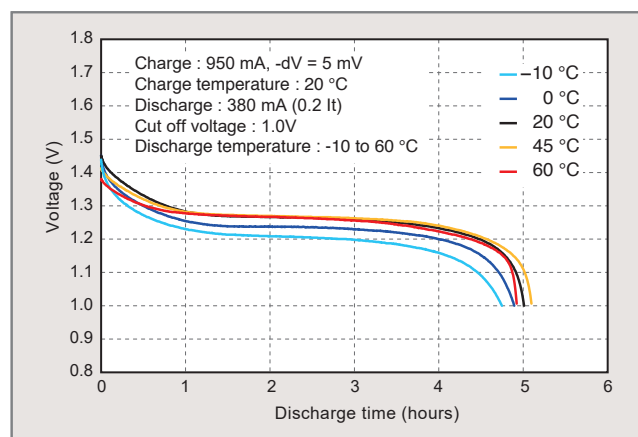

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.